

II-OUTLET DISTRIBUTION BOX



SPECIFICATIONS/MODERN PRECAST CONCRETE STANDARDS:

- CONCRETE STRENGTH: 4000 PSI MIN. @ 28 DAYS
- REINFORCING CONFORMS TO ASTM A615 & A185
- DESIGN: MAXIMUM EARTH COVER IS 4'-0"; NO TRAFFIC LOADS
- INLET & OUTLET EQUIPPED WITH PIPE SEALS FOR 4" PIPE



Environmental & Wastewater Division

PIPE SEALS FOR 4" PIPE (TYP)

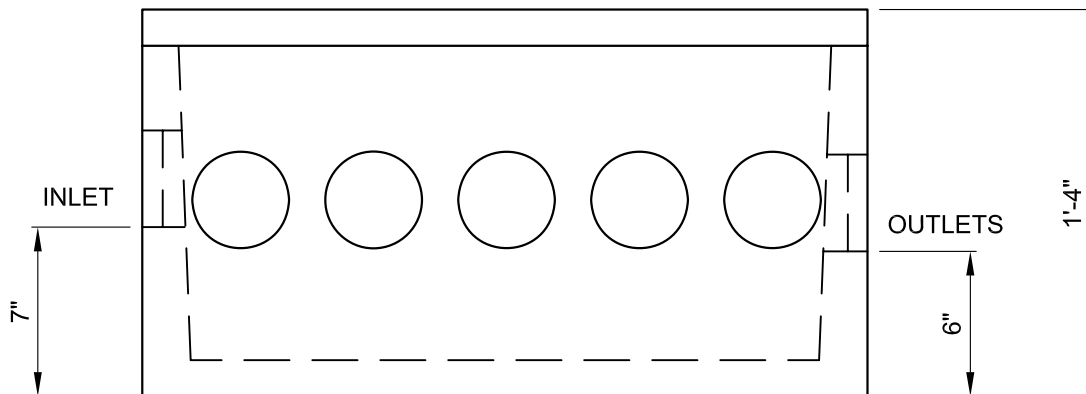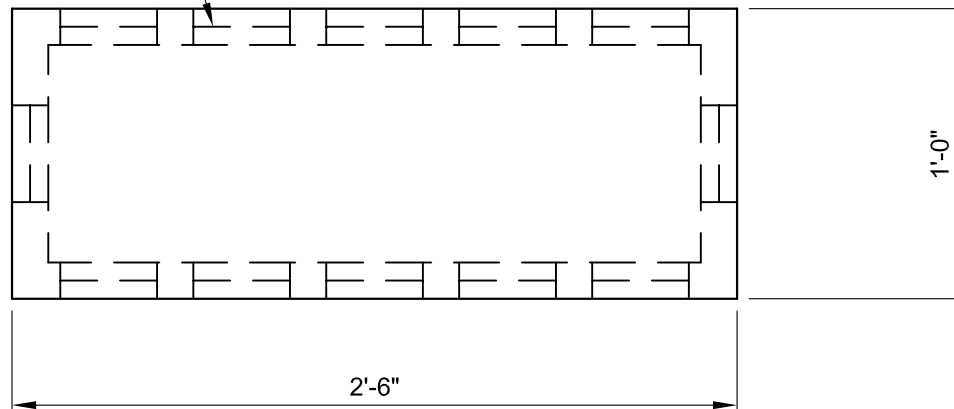

Modern ... Concrete Solutions

Modern Precast Concrete
Corporate Headquarters | 210 Durham Road, PO Box 339 | Ottsville, PA 18942
(610) 847-5112 | F (610) 847-1046 | www.modcon.com